

CAPTAIN

EU MODEL 263 (25 HP)



CAPTAIN
AGRI MACHINERY



THE **ROAR** GETS **LOUDER**
FROM THE **LAND** OF **LIONS**



Powered by
MITSUBISHI
DIESEL ENGINE





Note : Products undergo continuous upgradations.

www.captainagri.com

EU-ENGLISH

CAPTAIN

EU MODEL 263 - STAGE V

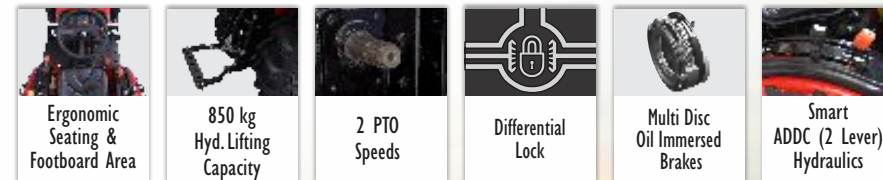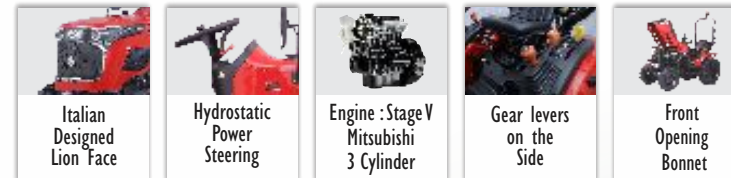

Narrow Track Option Separately Available in this Model

	SPECIFICATIONS	CAPTAIN 263 4WD Agriculture	CAPTAIN 263 4WD Turf	CAPTAIN 263 4WD Industrial / Flotation	CAPTAIN 263 4WD Agricultural Wide Plus	CAPTAIN 263 4WD Agrimax Turf RT 333 Garden	CAPTAIN 263 4WD Wider F-Agri	CAPTAIN 263 4WD Industrial (Regular)	CAPTAIN 263 4WD Basic - Agri
Engine	Engine Horse Power (kW)	25 (18.2)							
	Engine Type	Mitsubishi Stage-V S3L2							
	No. of Cylinder	3							
	Capacity (CC)	1319							
	Rated Speed (RPM)	2500							
	Cooling System	Liquid Cooled							
	Bore / Stroke (mm)	78/92							
Max Torque (Nm) @ RPM	76.3 (Nm) @ 2000 RPM								
Tires	Front	180/85D12	23 x 8.5 - 12	23 x 8.5 - 12	180/85D12	240/60R12	23 x 8.5 - 12	23 x 8.5 - 12	5.00 x 12
	Rear	8.30 x 20	33 x 15.5 - 16.5	33 x 15.5 - 16.5	280/70R20	320/65R18	280/70R18	12 x 16.5	8.00 x 18
Transmission	Type	Sliding Mesh Transmission : Side Shift Gear Levers							
	Gears	9 Forward, 3 Reverse							
	Max. Speed Rounded Off (km/hr)	20	18	19	20	19	18	19	18
	PTO RPM	540 & 540 E							
	Steering	Hydrostatic Power Steering							
Hyd.	Brake Type	Multi Disc Oil Immersed							
	Hydraulic System	Auto Draft Sensing & Depth Control (2 Levers)							
	Lift Capacity (kgs.)	850 (at Lower Link Point)							
	No. of Pumps	2 (One for Hydrostatic Steering & Other for Hydraulic System)							
Dimensions #	Auxiliary Hydraulics	1 DA Auxiliary Hydraulics with 2 QRCs							
	Size LxWxH (mm)	2700* x 1080 x 2100	2700* x 1390 x 2050	2700* x 1390 x 2050	2700* x 1167 x 2095	2700* x 1220 x 2080	2700* x 1220 x 2060	2700* x 1264 x 2050	2700* x 1050 x 2060
	Wheel Base (mm)	1490	1490	1490	1490	1490	1490	1490	1490
	Rear Track Center (mm)	811 to 988	980 to 1080	980 to 1080	883	883 to 988	845 to 988	939	743 to 988
	Weight (kg)	950	992	1020	981	981	956	994	929

*Dimensions are with Standard Lower Links, it may vary with longer linkages.

+/- 5% Tolerance variations

Note : Products undergo continuous upgradations. Hence, above mentioned specifications are subject to change without prior notice.